

Innovative Industrial Solutions



I.I.S.

Link2 Sensor LTS-06



The Link2 Sensor LTS-06 has multiple integrated radios allowing communication with a wide array of wireless instrumentation and telemetry systems. This small radio transceiver provides great portability and compact installation. The LTS-06 provides a smart instrument interface that has the ability to communicate with over 70 instruments from leading manufacturers. Connectivity can be achieved via wired connections via the DE-9 port or wirelessly to Bluetooth enabled devices. The LTS-06 reads and interprets important measurements, alarms, and the device status. This data is encrypted and transmitted in a low bandwidth format to compatible remote monitoring systems.

Radio Uplink

The LTS-06 uses a high power 900MHz Frequency Hopping Spread Spectrum (FHSS) radio to transmit instrument data wirelessly over longer distances. The LTS-06 can also communicate with other LTS-06 Mesh devices and optionally transmit the data back over the 900 MHz radio network to increase the wireless range of connected devices. Can be configured with an optional high power radio allowing long range wireless deployments with 900 MHz, 2.4GHz, Wi-Fi and cellular connectivity.

Compatibility

The LTS-06 is compatible with other existing devices containing the CNET Mesh Radio (may require firmware update). For Bluetooth connectivity, the LTS-06 can support Bluetooth Smart (4.0+ LE) and legacy Bluetooth SPP devices.

MESH WIRELESS


The internal 2.4 GHZ low power radio provides shares data with other nearby mesh radios (up to 200ft.)

BLUETOOTH SMART SUPPORT

Connectivity with nearby Bluetooth devices

WIRELESS ENCRYPTION

Instrument data is efficiently and securely transmitted wirelessly using integrated data encryption. This protects data from outsiders while maintaining the benefits of wireless technology.

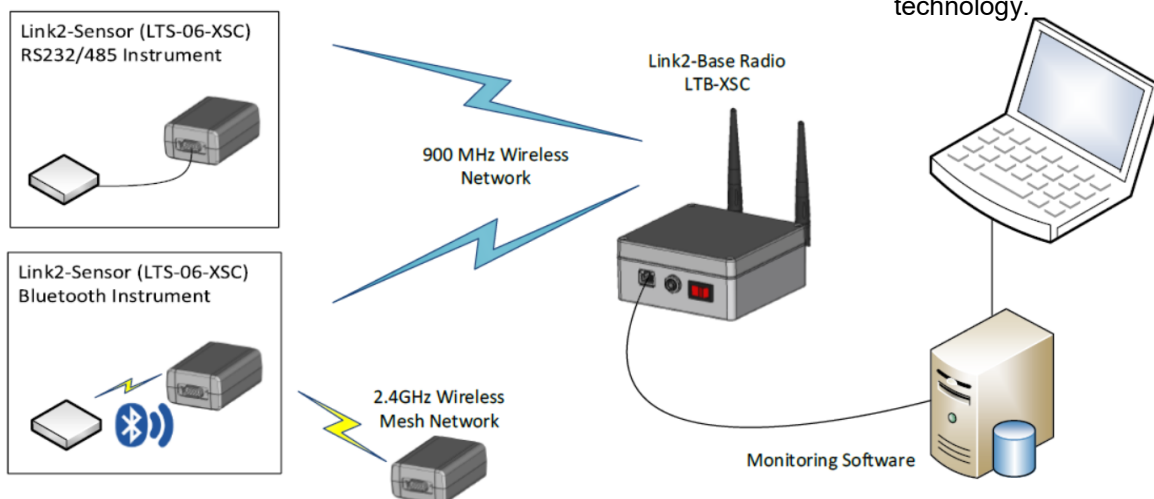

Innovative Industrial Solutions, Inc.

2830 Skyline Drive Russellville, AR 72802

Phone (479) 968-4266

Fax (479) 890-9072

www.i-i-s.net

Innovative Industrial Solutions



I.I.S.

Link2 Sensor LTS-06

900 MHz Radio	Range (indoor/urban RF line of sight):	Up to 2000'
	Range (outdoor RF line of sight):	Up to 1 mile
	Transmit Power Output	Up to 250 mW
	Frequency Range	902 MHz—928 MHz
	Receiver Sensitivity	-109 dBm (9600 baud)
	FCC Part 15.247	MCQ-XBPS3B
	Industry Canada (IC)	1846A-XBPS3B
Mesh Radio	Range (indoor/urban RF line of sight):	Up to 100'
	Range (outdoor RF line of sight):	Up to 200'
	Transmit Power Output	Up to 1.75 mW
	Frequency Range	2400 GHz—2.485 GHz
	Receiver Sensitivity	-95 dBm
	FCC Part 15.247	TYO-JN5168M0
	Industry Canada (IC)	7438A-CYO5168M0
Bluetooth Radio	Range (RF line of sight):	Up to 100'
	Transmit Power Output	10-16mW
	Frequency Range	2.402 GHz—2.480 GHz
	Receiver Sensitivity	-88 to -96 dBm
	FCC Part 15.247	QOQBT121
	Industry Canada	5123A-BGTBT121
Power Requirements	Internal Batteries	2 x AA Cell
	USB Power	5V DC @ <500 mA
General	Dimensions (H x W x L)	1.26" x 2.13" x 3.07"
	Weight (including batteries)	4.8 oz.
	Operating Temperature	-40° F - 185° F
External Connections	USB	Mini-B USB
	DE-9	9 pin serial for RS232 (4 wire) or RS485 (2 or 4 wire)

Innovative Industrial Solutions, Inc.

2830 Skyline Drive Russellville, AR 72802

Phone (479) 968-4266

Fax (479) 890-9072

www.i-i-s.net